

# Product Brief

ANYLINK WIRELESS PRODUCTS



## DP1272 – 868 MHz / 915 MHz

Low Power, Long Range UHF-band Transceiver Module


### WORLD'S HIGHEST LINK BUDGET TRANSCEIVER MODULE

#### Key Features:

- LoRa™ Modem
- 157.5 dB maximum link budget
- +20 dBm constant RF output vs. V supply
- Programmable bit rate up to 300 kbit/s
- High sensitivity: down to -137.5 dBm
- Bullet-proof front end: IIP3 = -12.5 dBm
- 89 dB blocking immunity
- Low RX current of 10 mA, 7µA register retention
- Fully integrated synthesizer with a resolution of 61 Hz
- FSK, GFSK, MSK, GMSK, LoRa™ and OOK modulation
- Preamble detection
- 127 dB Dynamic Range RSSI
- Automatic RF Sense and CAD with ultra-fast AFC
- Built-in temperature sensor and low battery indicator
- 16 x 22 mm Board RoHS-compliant
- Packet engine up to 256 bytes with CRC
- Built-in bit synchronizer for clock recovery
- Satisfies ETSI EN 300-220-1 and FCC part 15.247 regulations

#### Applications:

- Security and Wireless Alarm Systems
- Wireless Sensor Networks
- Sub-Metering (AMR)
- Personal Area Network
- Sports & Health Equipment
- Home and Building Automation
- Industrial Monitoring and Control
- Long range Irrigation Systems
- IOT

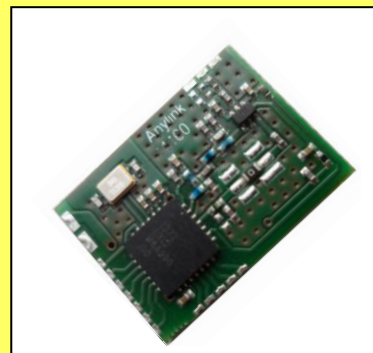

*The LoRa name and associated logo are trademarks of Semtech Corporation or its subsidiaries*

WWW.ANYLINK.DE

ANYLINK  
SYSTEMS AG


# Product Brief

## DP1272

Low Power, Long Range UHF-band Transceiver Module

Characteristics					
Parameter	Min	Typ	Max	Unit	Condition
<b>Operating Conditions</b>					
Operating temperature range	-20		70	°C	
Operating supply voltage	2.1		3.6	V	
<b>Current Consumption</b>					
Current consumption Rx		10.5		mA	LnaBoost = 00
		125.0		mA	+20 dBm, on PA_BOOST (FSK, OOK)
		92.0		mA	+17 dBm, on PA_BOOST (LoRa™)
Current consumption, sleep mode		7	1	µA	
<b>RF Characteristics</b>					
Frequency range	860		902	MHz	
	902		1020	MHz	
Data rate (programmable)	1.2		300	Kbit/s	FSK
	1.2		32	Kbit/s	OOK
Data rate in LoRa™ Mode	0.24		37.5	Kbit/s	LoRa™
Tx Output power (programmable)	-1		+20	dBm	
Rx sensitivity		-115		dBm	FSK
		-117		dBm	OOK
		-137.5		dBm	CR = 4/8, SF = 12, BW'_L = 125 kHz, LoRa™ Mode

Conditions: Temp=25°C, VDD=3.3V, crystal frequency=32 MHz, carrier frequency= 915MHz, modulation 2-level FSK without pre-filtering, data rate=4.8 kb/s, Fdev=5kHz, BW<sub>(SSB)</sub>=10kHz, BER=0.1%, unless otherwise specified.

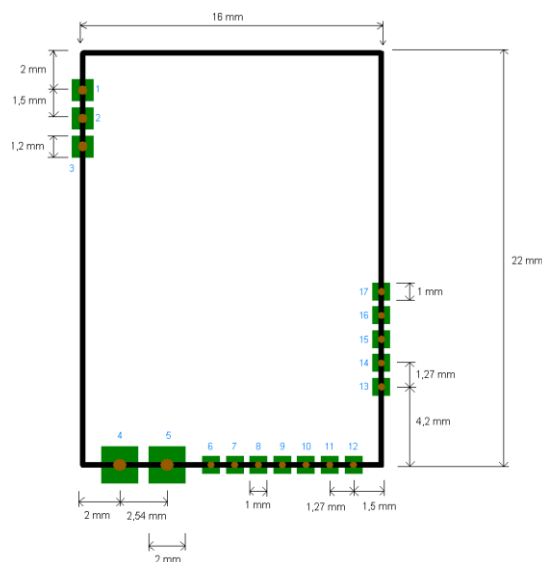

Visit our website to locate the most current product specifications, datasheets and contact information for your local Distributor.  
 The LoRa name and associated logo are trademarks of Semtech Corporation or its subsidiaries

WWW.ANYLINK.DE

**ANYLINK** SYSTEMS AG

Ringlerstraße 19, D - 85057 Ingolstadt